





B0

Operating Current	5-15 mA	
Operational Frequency	50 Hz	
Operational Voltage	100-230V AC	
Product	Pilot	
Color		
Illumination	with LED	
Dia	22 mm	
Power Consumption	<4 VA	
Insulation Voltage	Ui	300V
Operating Temperature	-15 / + 70 °C	
Pollution Degree	3	
Protection Degree	IP50	
Cable Section	1.-2.5 mm ²	
Screw Torque	1,5 Nm	
Serial	B Series Plastic	
Electrical Life	Min Hour	10000
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availability	
	Variety of products for all areas of application	
Standards / Certificates	TS EN 60947-5-1	



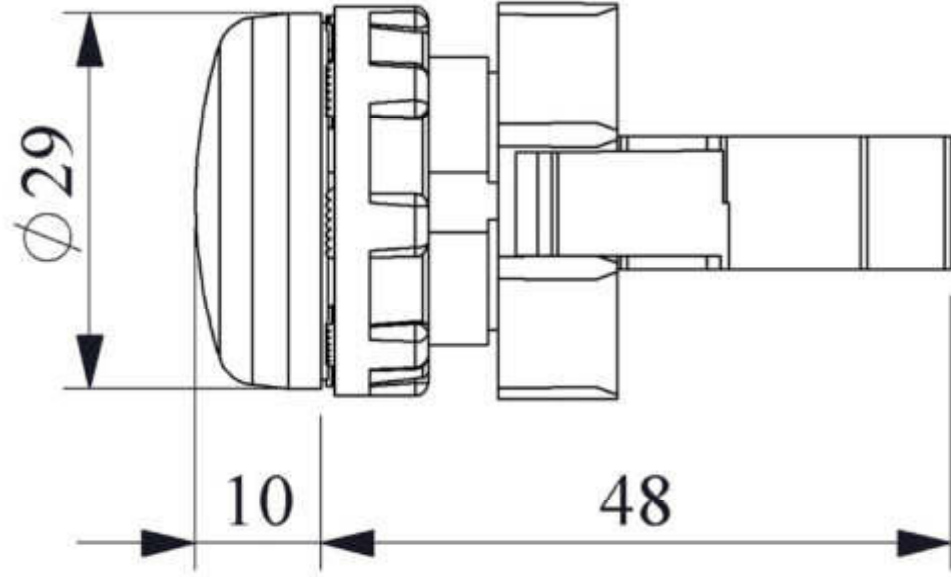

Montaj Ölçüsü $\phi 22.4 \pm 0.2$ mm

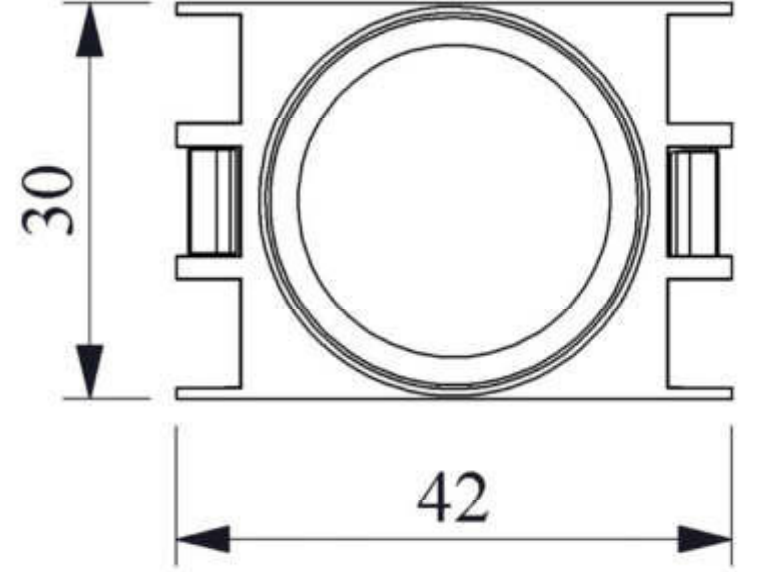

Devre Şeması

