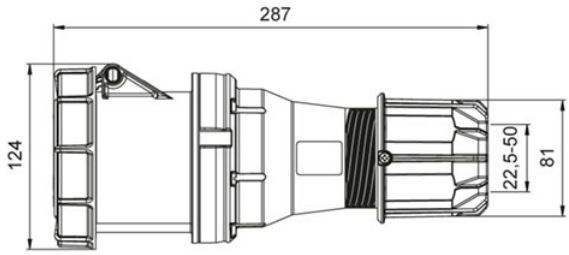

CEE Connector 125A 200/346V-240/415V 3P+N+PE 6 h IP67 Screw Connection

Product Code: 406420

METECEE - Connector, 125A, 200/346V-240/415V, 3P+N+PE, 6 h, IP67, Colour:Red, Screw Connection, Contact Material:Nikel Plated Brass,Cable Entry: Cable Gland, Cable Cross Section: 16-50/1-2,5(pilot contact)mm² ,Made in Austria

Technical Information

Version:	
Product Name	Connector
Angle	Straight
Connection Design	Screw Connection
Technical Characteristics:	
Current (A)	125A
Poles No. (P99)	5P
Voltage (V)	380-415V
Voltage EN 60309-2 (V)	400V
Poles No. (P)	3P+N+PE
Protection Degree	IP67
Position Of Earth Contact (h)	6 h
Frequency (Hz)	50~60Hz
Cable Entry	Cable Gland
Cable Cross Section for Wire Flexible (mm²)	16-50/1-2,5(pilot Contact)mm²
Cable Cross Section for Wire Solid (mm²)	-
Strain Relief (Ncm)	-
Dismantling Length (mm)	100mm
Contact Screws (Ncm)	450/100(pilot kontak)Ncm
Stripping Length (mm)	24-27mm
Flange Size Vertical (mm)	-
Flange Size Horizontal (mm)	-
Drill Hole Distance Vertical (mm)	-
Drill Hole Distance Horizontal (mm)	-
Additional Technical Iformation	Extra: pilot contact with screw terminal (rated current 2A)
Material Propoerties:	
Colour	Red
Material of Enclosure	Plastic
Contact Material	Nikel Plated Brass
Certificateion:	
Certificates	ÖVE |TSE
Commercial Data:	
Weight/pcs	-
Packaging Quantitiy	2
HS Code	8536.69.90.00.18
Country of Origin	Austria

METE ENERJİ A.Ş.

Address:

10007 Sk. No 34 A.O.S.B 35620 Çiğli, İzmir, Türkiye
Tel: +90 (232) 376 86 86

© 2020 Mete Energy All Rights Reserved.